



L2 Features

- Kit version for mounting on a motor or other shaft
- Low profile, only 0.398 in. tall
- Supports 12 shaft sizes (2 to 8 mm and 1/8 to 5/16 in.)
- For NEMA 17 to NEMA 34 and larger motors
- Resolutions from 32-1,250 CPR (128-5,000 PPR)
- 2 channel quadrature TTL square wave output
- Optional Index channel
- High retention connector/cable (sold separately)



US Digital L2 Motor Encoder Description

The US Digital L2 motor encoder is a low-profile rotary encoder with a height of 0.398" that mounts directly to a motor or other rotating shaft. This optical encoder features a rugged, glass-filled polymer housing and is designed for easy installation into space-limited applications. The L2 has a standard 0.75 in. bolt spacing mount.




The L2 optical rotary encoder contains a precision machined aluminum hub with a specially patterned Mylar disk. This disk, in combination with our proprietary optical encoder module, creates a system that is highly tolerant to mechanical misalignment.

The L2 incremental encoder has a single-ended output and is designed for use with a high-retention connector/cable, which are sold separately.

Mechanical Drawings

L2 Motor Encoder (Default)

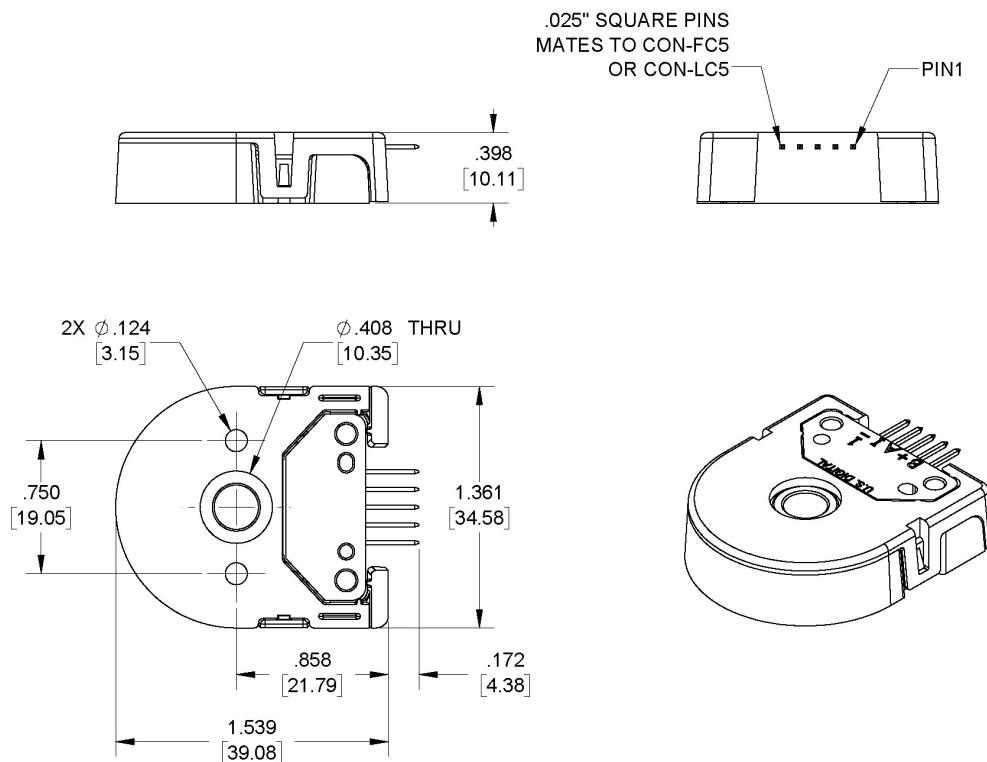

RELEASE DATE: 11/21/2025

US DIGITAL 1400 NE 136th Avenue
Vancouver, Washington 98684, USA

info@usdigital.com
www.usdigital.com

Local: 360.260.2468
Toll-free: 800.736.0194

UNITS: INCHES [MM]
METRIC SHOWN FOR REFERENCE ONLY

Specifications

ENVIRONMENTAL

| PARAMETER | VALUE | UNITS |
|--|------------|-------|
| Operating Temperature, CPR < 2000 | -40 to 100 | C |
| Operating Temperature, CPR ≥ 2000 | -25 to 100 | C |
| Electrostatic Discharge, IEC 61000-4-2 | ± 4 | kV |
| Vibration (10Hz to 2kHz, sinusoidal) | 20 | G |
| Shock (6 milliseconds, half-sine) | 75 | G |

MECHANICAL

| PARAMETER | VALUE | UNITS |
|--|---|----------------------|
| Max. Shaft Axial Play | ±0.010 | in. |
| Max. Shaft Runout | 0.004 T.I.R. | in. |
| Max. Acceleration | 250000 | rad/sec ² |
| For CPR ≤ 1250: Max. RPM (1) Max. A/B Frequency e.x. CPR=1250, Max. RPM=14400 e.x. CPR=100, Max. RPM=60000 | minimum value of $((18 \times 10^6) / \text{CPR})$ and (60000) 300 | RPM kHz |
| Typical Product Weight | 0.53 | oz. |
| Codewheel Moment of Inertia | 8.0×10^{-6} | oz-in-s ² |
| Hub Set Screw | #4-48 | |
| Hex Wrench Size | 0.050 | in. |
| Mounting Screw Size | #2-56 or #4-40 | |
| Required Shaft Length (2) | minimum 0.398 | in. |
| Index Alignment to Hub Set Screw | 180 Typical | degrees |
| Technical Bulletin TB1001 - Shaft and Bore Tolerances | Download https://www.usdigital.com/media/yyvb4qsy/tb_1001.pdf | |

(1) 60000 RPM is the maximum rpm due to mechanical considerations. The maximum rpm due to the module's maximum frequency response is dependent upon the module's resolution (CPR).

(2) Including Axial play.

TORQUE SPECIFICATIONS

| PARAMETER | VALUE | TORQUE |
|-----------------------------|-------|--------|
| Hub Set Screw | 2-3 | in-lbs |
| Base Mounting Screw (#4-40) | 4-6 | in-lbs |

PHASE RELATIONSHIP

A leads B for clockwise shaft rotation, and B leads A for counterclockwise rotation viewed from the cover side of the encoder.

ELECTRICAL

- Specifications apply over the entire operating temperature range.
- Typical values are specified at $V_{CC} = 5.0V_{DC}$ and $25^{\circ}C$.
- For complete details, see the EM1 (<https://www.usdigital.com/products/encoders/incremental/components/modules/em1/>) or EM2 (<https://www.usdigital.com/products/encoders/incremental/components/modules/em2/>) product pages.

| PARAMETER | MIN. | TYP. | MAX. | UNITS | CONDITIONS |
|----------------------------|------|------|------|-------|--|
| Supply Voltage | 4.5 | 5.0 | 5.5 | V | |
| Supply Current | | 27 | 33 | mA | CPR < 500, no load |
| | | 54 | 62 | mA | CPR \geq 500 and < 2000, no load |
| | | 72 | 85 | mA | CPR \geq 2000, no load |
| Low-level Output | | | 0.5 | V | $I_{OL} = 8mA$ max., CPR < 2000 |
| | | | 0.5 | V | $I_{OL} = 5mA$ max., CPR \geq 2000 |
| | | 0.25 | | V | no load, CPR \geq 2000 |
| High-level Output | 2.0 | | | V | $I_{OH} = -8mA$ max. and CPR < 2000 |
| | 2.0 | | | V | $I_{OH} = -5mA$ max. and CPR \geq 2000 |
| | 4.8 | | | V | no load and CPR < 2000 |
| | 3.5 | | | V | no load and CPR \geq 2000 |
| Output Current Per Channel | -8 | | 8 | mA | CPR < 2000 |
| | -5 | | 5 | mA | CPR \geq 2000 |
| Output Rise Time | | 110 | | nS | CPR < 2000 |
| | | 50 | | nS | CPR \geq 2000, $\pm 5mA$ load |
| Output Fall Time | | 100 | | nS | CPR < 2000 |
| | | 50 | | nS | CPR \geq 2000, $\pm 5mA$ load |



PIN-OUT

| PIN | DESCRIPTION |
|-----|-------------|
| 1 | Ground |
| 2 | Index |
| 3 | A channel |
| 4 | +5VDC power |
| 5 | B channel |

Note: 5-pin single-ended mating connector is CON-C5 (<https://www.usdigital.com/products/accessories/connectors/con-c5/>) or CON-LC5 (<https://www.usdigital.com/products/accessories/connectors/con-lc5/>)



ACCESSORIES

1. Centering Tool

Part #: CTOOL - (Shaft Diameter)

This reusable tool centers the shaft within the encoder base during assembly. It must be used for the proper functioning of the encoder.

2. Hex Tool

Part #: HEXD-050

Hex driver, 0.050" flat-to-flat for #3-48 or #4-48 set screws. Included with **-B** or **-1** packaging options for order quantities of 10 or more.

Part #: HEXW-050

Hex wrench, 0.050" flat-to-flat for #3-48 or #4-48 set screws. Included with **-B** or **-1** packaging options for order quantities of 9 or less. Included with **-3** packaging option for all order quantities.

3. Spacer Tool

Part #: SPACER-L2

This reusable tool sets the correct spacing between the disk and sensor during assembly. It must be used for the proper functioning of the encoder.

4. Screws

Part #: SCREW-256-250-PH

Description: Pan Head, Phillips #2-56 UNC x 1/4"

Use: Base Mounting

Quantity Required: 2

Screws are not included

Part #: SCREW-440-188-PH

Description: Pan Head, Phillips 4-40 UNC x 3/16"

Use: Base Mounting

Quantity Required: 2

Screws are not included

Part #: SCREW-440-250-PH

Description: Pan Head, Phillips #4-40 UNC x 1/4"

Use: Base Mounting

Quantity Required: 2

Screws are not included

Part #: SCREW-448-063-SS

Description: Socket Head Set Screw, 4-48 UNC x 1/16"

Use: Hub/Disk Mounting for 5/16" - 10mm Bore

Quantity Required: 1

Screw is included

Part #: SCREW-448-125-SS

Description: Socket Head Set Screw, 4-48 UNC x 1/8"


Use: Hub/Disk Mounting for 2mm - 1/4" Bore

Quantity Required: 1

Screw is included

OUTPUT WAVEFORMS

SINGLE-ENDED

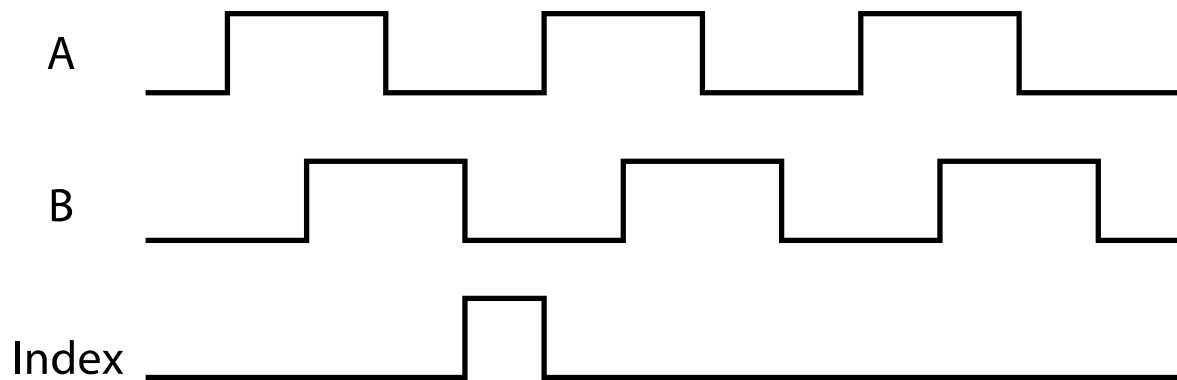

Notes

- US Digital® warrants its products against defects in materials and workmanship for two years. See complete warranty (<https://www.usdigital.com/company/warranty>) for details.
- Cables and connectors are not included and must be ordered separately.

Configuration Options

| L2 | CPR (Cycles Per Revolution) | Bore Size | Index | Cover | Base | Packaging |
|----|-----------------------------|-------------|-------------------------|----------------------|----------------------|--|
| | | | IE (<i>Index</i>) | D (<i>Default</i>) | D (<i>Default</i>) | Bulk (B) - Includes one centering, hex and spacer tool per order, plus an extra set per 100 encoders. |
| | | | NE (<i>Non-Index</i>) | | | Individual (1) - Includes one centering, hex, and spacer tool per order, plus an extra set per 100 encoders. |
| | 32 | 079 (2.0mm) | | | | Individual (2) - Includes one centering, hex, and spacer tool with each encoder. |
| | 50 | 118 (3.0mm) | | | | |
| | 96 | 125 (1/8") | | | | |
| | 100 | 156 (5/32") | | | | |
| | 120 | 157 (4.0mm) | | | | |
| | 192 | 188 (3/16") | | | | |
| | 200 | 197 (5.0mm) | | | | |
| | 250 | 236 (6.0mm) | | | | |
| | 256 | 250 (1/4") | | | | |
| | 360 | 276 (7.0mm) | | | | |
| | 400 | 313 (5/16") | | | | |
| | 500 | 315 (8.0mm) | | | | |
| | 512 | | | | | |
| | 540 | | | | | |
| | 720 | | | | | |
| | 800 | | | | | |
| | 900 | | | | | |
| | 1000 | | | | | |
| | 1024 | | | | | |
| | 1250 | | | | | |

PLEASE NOTE: This chart is for informational use only. Certain product configuration combinations are not available. Visit the L2 product page (<https://www.usdigital.com/products/L2>) for pricing and additional information.