



## CA-RC10-SH-NC Product Description


A 10-pin MIL-C-5015 female connector on one end of a 12-conductor shielded round 24 AWG cable. This low-temperature version has a range of -20C to +80C.



**WARNING:** This product can cause exposure to substances, such as *phthalate plasticizers*, known to the State of California to cause cancer and reproductive harm. For more information, go to [oehha.ca.gov/proposition-65](https://oehha.ca.gov/proposition-65) (<https://oehha.ca.gov/proposition-65>).

## Specifications

### PIN-OUT

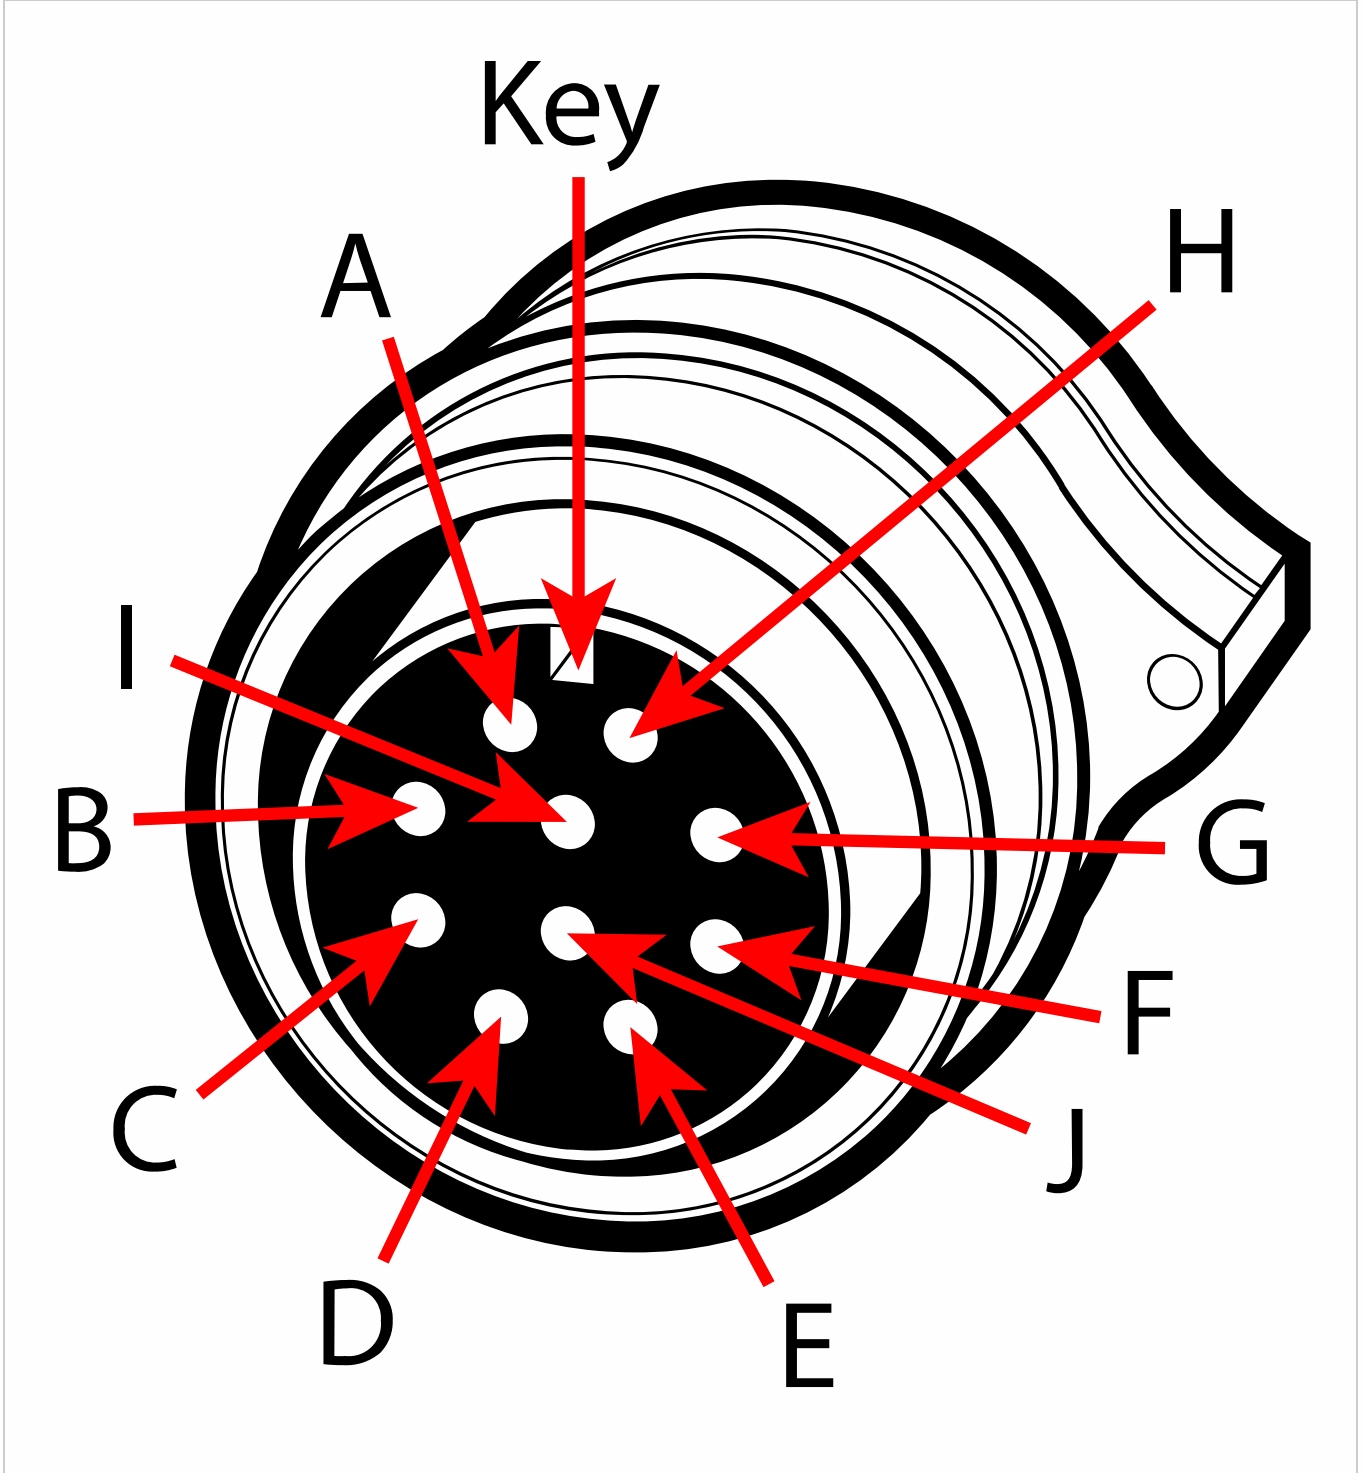



PIN	HD25 DESCRIPTION	HD25A DESCRIPTION	COLOR
A	A+ Channel	DataH	Blue / White stripe
B	B+ Channel	Busy+	Brown / White stripe
C	I+ Channel(*)	Analog+	Orange / White stripe
D	+VDC	Power	Green / White stripe
E	-	-	Gray / White stripe
F	Common	Common	White / Gray stripe
G	Case Ground	Case Ground	White / Green stripe
H	A- Channel	DataL	White / Blue stripe
I	B- Channel	Busy-	White / Brown stripe
J	I- Channel(*)	Analog-	White / Orange stripe

\* Only available when Index channel is specified.

## Notes

- US Digital® warrants its products against defects in materials and workmanship for two years. See complete warranty (<https://www.usdigital.com/company/warranty>) for details.

## Configuration Options

CA-RC10-SH-NC	-	First Connector	-	Cable Type	-	Second Connector	-	Length
		RC10		SH		NC		Length

**PLEASE NOTE: This chart is for informational use only.** Certain product configuration combinations are not available. Visit the CA-RC10-SH-NC product page (<https://www.usdigital.com/products/CA-RC10-SH-NC>) for pricing and additional information.